


Product information

Nilar ENERGY product series

- Nilar Hydride[®] battery technology

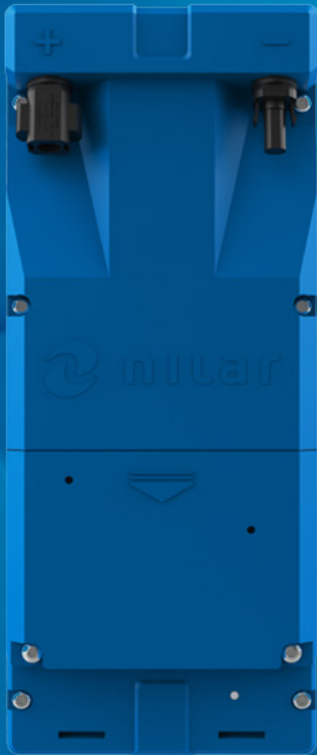

BENEFITS IN BRIEF

- Long term power
- Superior safety benefits
- Environmentally friendly
- Optimal for peak power applications
- Expedient energy availability for medium power
- Suitable for shorter cycle duration applications

Patented Nilar design

Through the deployment of our previous battery product, our dedicated research and design staff gained significant insights into improvements and innovations towards a better battery. The plastic material used in the laser-welded module was replaced with a more resilient material. Operational guidance was fine-tuned for outstanding efficiency and the battery was upgraded for better processing of the dynamic data and communication with external systems.

The result is this newly unveiled Nilar Energy battery. The 10 Ah Energy battery has retained the volumetric size and quality performance of its predecessor, operating expertly at a continuous 1C charge and discharge rate. It is the exceptional choice for peak power reduction and provides expedient energy for any medium power application.

Nilar ENERGY product series

ELECTRICAL CHARACTERISTICS BATTERY PACK	96V	108V	120V	144V	Unit
Capacity	10	10	10	10	Ah
Cycles	2000	2000	2000	2000	Cycles
Gravimetric energy density	40,7	41,2	41,7	42,4	Wh/kg
Volumetric energy density	122,1	124,4	126,3	129,3	Wh/l (liter)
PROTECTION CLASS					
Battery pack incl. IMU	IP21	IP21	IP21	IP21	IP
OPERATING CONDITIONS					
Ambient temperature range	-10 to +40	-10 to +40	-10 to +40	-10 to +40	°C
Service life	20+	20+	20+	20+	years

BATTERY PACK	Art. nr.	Product description	No. of battery modules	Pack voltage (V)	System voltage (V)	Rated Energy (kWh)	Max charge rate (C-rate)	Max discharge rate (C-rate)	Max continuous charge/discharge rate (C-rate)	Measurements DxHxW (mm)	Weight
E-96V-10Ah	200030E	Battery pack 96V + IMU Energy	8	96	96	0,96	2	3	1	248x306x127	24
E-108V-10Ah	200031E	Battery pack 108V + IMU Energy	9	108	108	1,08	2	3	1	273x306x127	26
E-120V-10Ah	200032E	Battery pack 120V + IMU Energy	10	120	120	1,2	2	3	1	293x306x127	29
E-144V-10Ah	200033E	Battery pack 144V + IMU Energy	12	144	144	1,44	2	3	1	337x306x127	34

HOME BOX	Art. no.	Product description	No. of battery packs	Pack voltage (V)	System voltage (V)	Rated Energy (kWh)	Max charge rate (kW)	Max discharge rate (kW)	Max continuous charge/discharge rate (kW)	Measurements DxHxW (mm)	Weight
E-576V-5,76kWh	200034E	Home Box - Energy+	4	144	576	5,76	5,76	11,52	3,46	270x945x900	207

CABINET	Art. nr.	Product description	No. of battery packs	Pack voltage (V)	System voltage (V)	Rated Energy (kWh)	Max charge rate (kW)	Max discharge rate (kW)	Max continuous charge/discharge rate (kW)	Measurements DxHxW (mm)	Weight
E-576V-11,52kWh	200035E	Cabinet 2 string - Energy	8	144	576	11,52	11,52	23,04	6,91	655x1033x701	357
E-576V-17,28kWh	200036E	Cabinet 3 string - Energy	12	144	576	17,28	17,28	34,56	10,37	655x1388x701	530
E-576V-23,04kWh	200037E	Cabinet 4 string - Energy	16	144	576	23,04	23,04	46,08	13,82	655x1743x701	703
E-576V-28,80kWh	200038E	Cabinet 5 string - Energy	20	144	576	28,80	28,80	57,6	17,28	655x2098x701	876

RACK	Art. nr.	Product description	No. of battery packs	Pack voltage (V)	System voltage (V)	Rated Energy (kWh)	Max charge rate (kW)	Max discharge rate (kW)	Max continuous charge/discharge rate (kW)	Measurements DxHxW (mm)	Weight
E-576V-57,60kWh-M	200039E	Rack-M - Energy	40	144	576	57,60	57,60	115,20	34,56	615x1996x1509	1731
E-576V-57,60kWh-S	200040E	Rack-S - Energy	40	144	576	57,60	57,60	115,20	34,56	615x1996x1509	1731

Nilar AB
Headquarters and Sales
 Stockholmsvägen 116 B
 SE-187 30 Täby
 Sweden
 Phone: +46 (0)8 768 00 00
 Email: sales.europe@nilar.com

Nilar AB
R&D and Production
 Bönavägen 55
 Box 8020
 SE-800 08 Gävle
 Sweden
 Phone: +46 (0)26 960 90
 Email: production@nilar.com

Nilar Inc.
R&D and Sales
 40 W. Littleton Blvd, Suite 210-63
 Littleton, CO 80120
 USA
 Phone: +1 720 446 0169
 Email: sales.america@nilar.com

www.nilar.com